

WJ-COM-XX-AH




Feature

- ▶ 32 bit ARM Core(M3)
- ▶ High Speed data translation
- ▶ Selectable input / output communication format
- ▶ Selectable Output Protocol
- ▶ Display information of Multi Converter states

Specifications

Connecters	7 x Plugin terminal blocks x 2
Power	+24V DC
Temperature	-20 ~ 70°C
Humidity	10 ~ 90%
Weight	TBD
Input	RS232 or Ethernet or R-Sense or PNT(Pulse Counter) or RS422/485 or Analog(4~20mA)
Output	RS422/485or Ethernet or RS232 or Analog(4~20mA)
Display	16 x 2 STN Character LCD
Material/Color	Aluminum Case / Gray
Dimension	125 x 145 x 62 (mm)

External Dimension (WJ-COM-XX-AH)

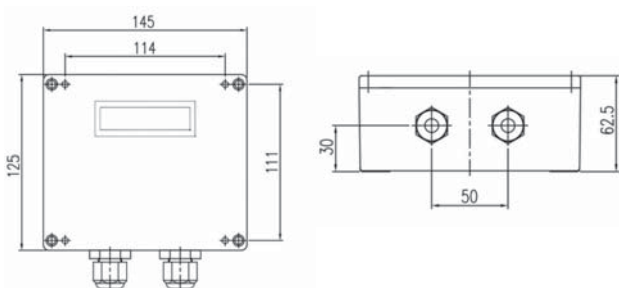


WJ-COM-XX-DIN




Specifications

Connecters	12 x Plugin terminal blocks x 2
Power	+24V DC
Temperature	-20 ~ 70°C
Humidity	10 ~ 90%
Weight	TBD
Input	RS232 or Ethernet or R-Sense or PNT(Pulse Counter) or RS422/485 or Analog(4~20mA)
Output	RS422/485or Ethernet or RS232 or Analog(4~20mA)
Display	12 x 2 STN Character LCD
Material/Color	Plastic Case /
Dimension	87.2 x 70.6 x 59 (mm)


External Dimension (WJ-COM-XX-DIN)

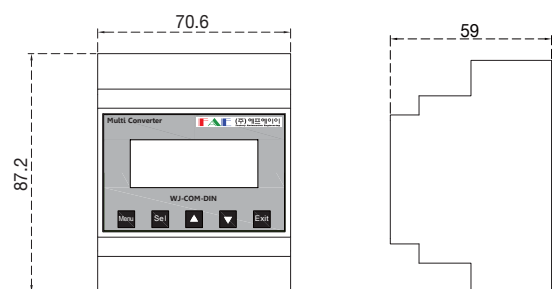

Mount Dimension (WJ-COM-XX-AH)

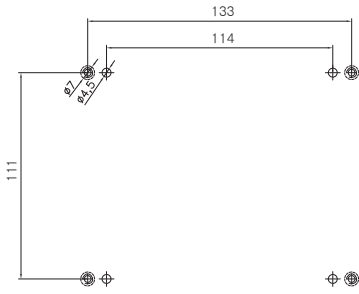


Mount Dimension (WJ-COM-XX-DIN)

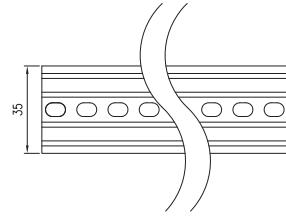


Ordering Code

WJ-COM-XX-XX

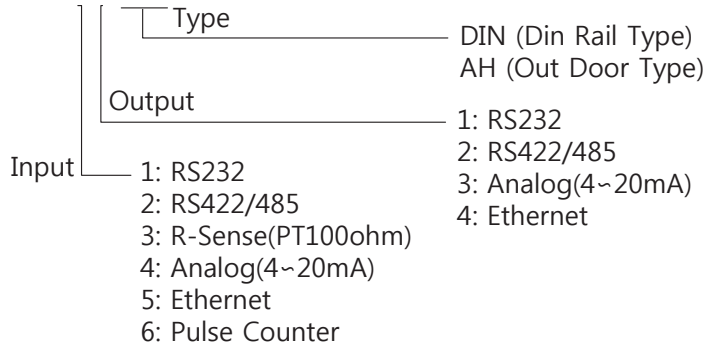


Device Configuration

Input

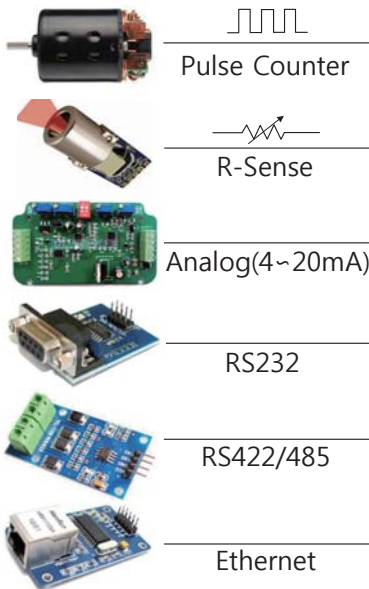

Output

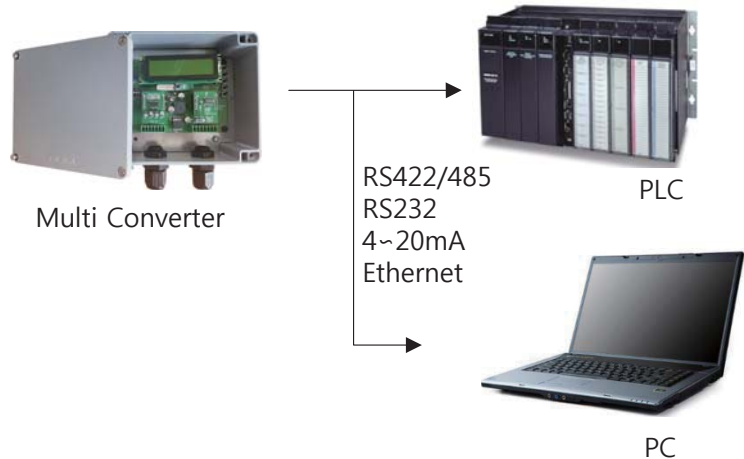

제조원 | **FAE (주)에프에이**
 Factory Automation Engineering
 전남 광양시 남산3길 19(광영동)
 TEL : 061-772-6306
 FAX : 061-772-6309
 www.pro-fae.co.kr

대리점